

LFP Series Lithium-ion Battery is an ideal replacement for traditional lead acid battery utilizing advanced LiFePO<sub>4</sub> technology and integrated BMS with the benefits of long cycle life, light in weight, safety and excellent high and low temperature performance. LFP Series Lithium-ion Battery is widely used in energy storage, UPS, golf cart and other lead acid battery replacement.



### Superior Character

- Super Long Service Life
- High Safety Ensured by Smart BMS
- Fast Charge and High Rate Discharge Power
- Low Total Cost of Ownership (TCO)
- High Energy Density by Adopting LFP Cells
- High Cycle Round Trip Efficiency (RTE)
- Wide Working Temperature Range
- Maintenance Free

### General Specification

#### Electrical Characteristics

Nominal Voltage	51.2V
Nominal Capacity@0.2C	100Ah
Energy	5120Wh
Internal Resistance	≤40Ω
Cycle Life	≥3000 Cycles
Months Self Discharge	≤3% per month at 25℃

#### Mechanical

Cell & Method	IFR32700 N60, 4S17P Or Prismatic-100
Plastic Case	Metal
Dimension(L × W × H × TH)	5U
Weight	Approx. 47Kg
Terminal	M8

#### Standard Charge

Charge Voltage	57.6V
Charge Mode(CC/CV)	At 0℃~45℃ temperature, charged to 57.6V at a constant current of 0.2C, and then charged continuously with constant voltage of 57.6V until the current was not more than 0.02C.
Charge Current	20A
Max. Charge Current	50A

#### Standard Discharge


Discharge Current	50A
Max. Continuous Current	100A
Max. Pulse Current	200A(<3S)
Discharge Cut-off Voltage	40.0V

#### Operating Environment


Charge Temperature	0℃ to 45℃(32°F to 113°F) @60±25% Relative Humidity
Discharge Temperature	-20℃ to 60℃(-4°F to 140°F) @60±25% Relative Humidity
Storage Temperature	0℃ to 45℃(32°F to 113°F) @60±25% Relative Humidity
Water Dust Resistance	IP55

Characteristic Curves


Discharge Capacity in relation to Discharge Rate

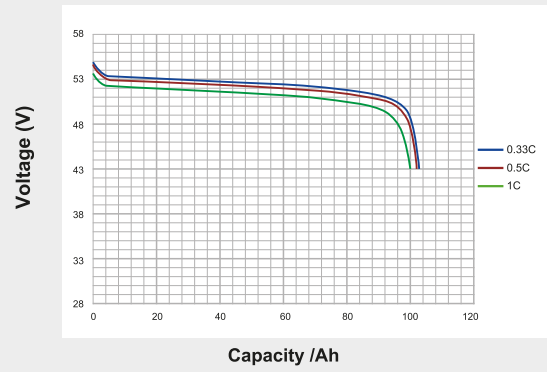


Temperature Effect in relation to Battery Capacity

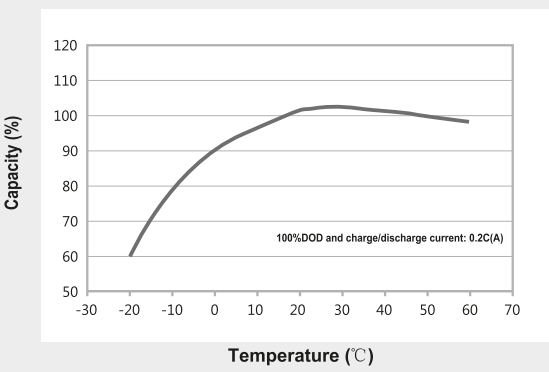


Discharge Time in relation to Discharge Rate

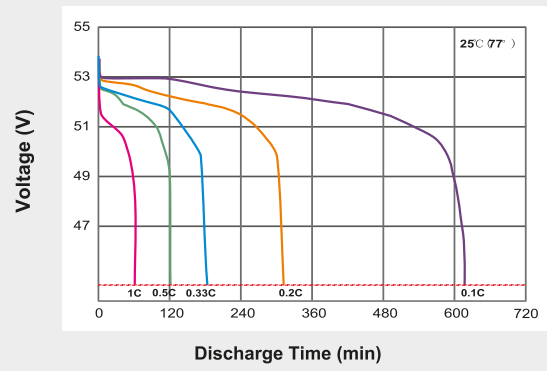


Depth of Discharge in relation to Cycle Life

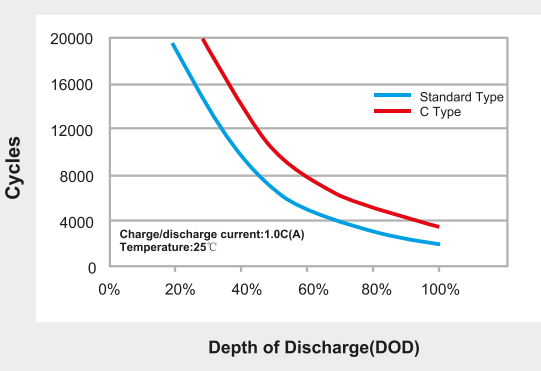


Cycle Curves at different DOD & Temp of C Type

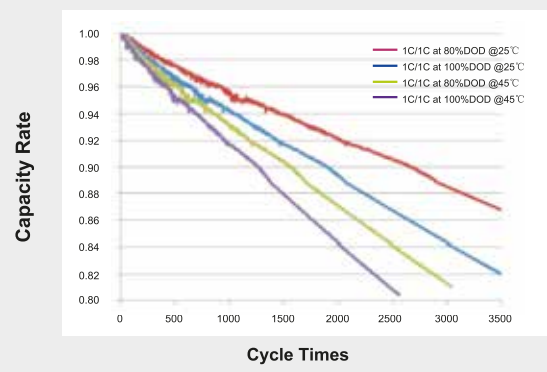

Cycle Curves at different DOD & Temp of C Type

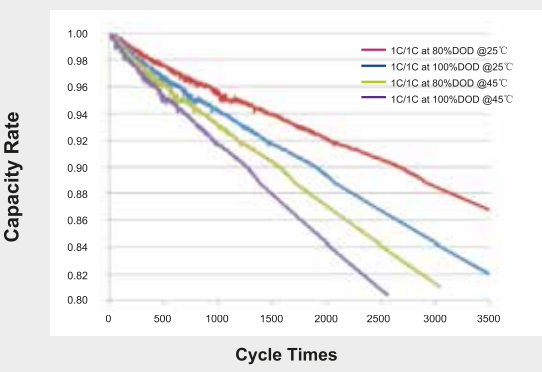

verload protection	Temperature protection	Short circuit protection	Batteries to protect
The overcharge protection	Put protection	Over current protection	Over voltage protectionO

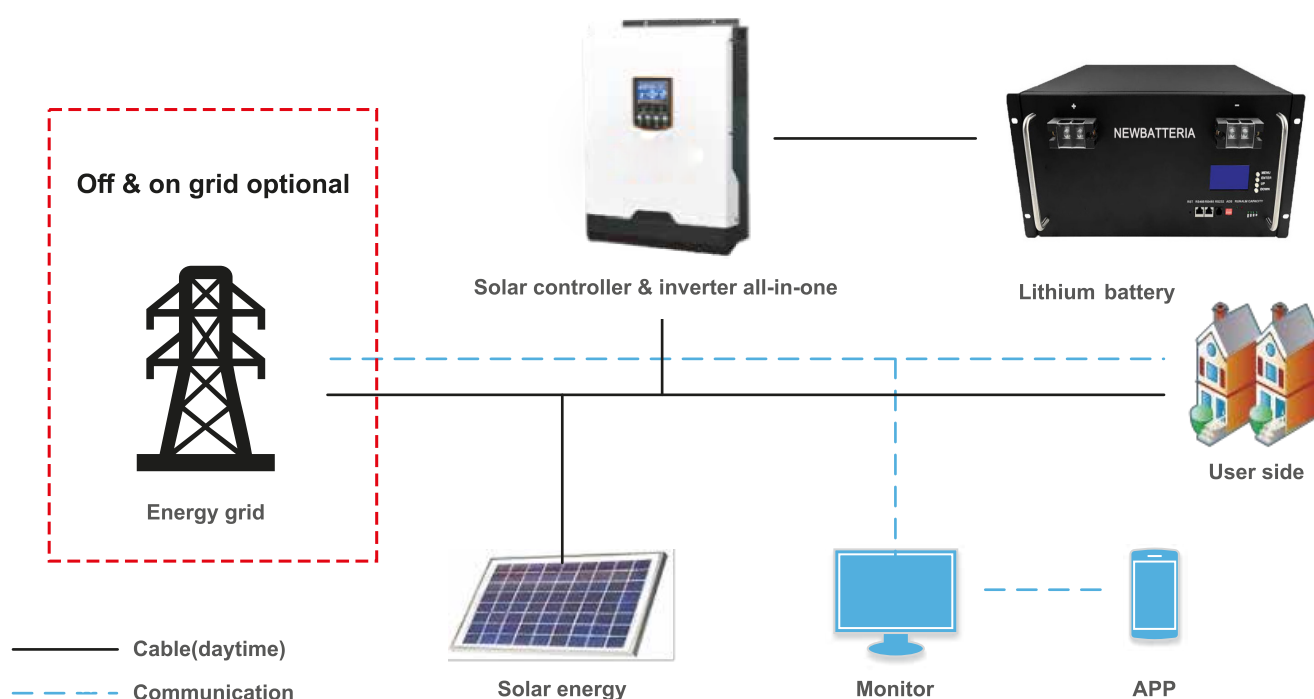

## Applications

- Oil and electricity hybrid energy storage system
- Grid frequency adjustment energy storage system
- New energy communication base station, Core computer room, IDC ,UPS
- New energy generation (solar, wind, PV/wind hybrid) access to energy storage system
- Smart grid, micro-grid system
- Mobile container storage system
- Other energy Storage System
- Peak load shifting energy storage system
- Load tracking energy storage system



## Standard Compliance



## NEWBATTERY COMPANY

Add: No. 14 Jingtian Lane, Kengzi Town, Pingshan District  
Shenzhen, China. 518122

Tel: +86 15303829027 Fax: +86 (755) 28639198

Email: [info@newbattery.com](mailto:info@newbattery.com) Web: [www.newbattery.com](http://www.newbattery.com)

